


## CHUNG TAI FIRE RATED LATERALLY SLIDING ROLLER SHUTTER

- Performance:** • With 2 & 4 hours Fire Rating
- Materials :** • Stainless steel SUS 316 & SUS 304, hot dip galvanized mild steel or combination of GMS and stainless steel.
- Sizes :** • To suit opening up to 8000mm width x 7000mm height (double leaf)  
• Individual assessment for larger sizes is available.
- Operation :** • Electric motor driven.  
• Control systems ensure shutters close when fire signal is received.




Technology of laterally sliding roller shutter can solve the problem of limited headroom.

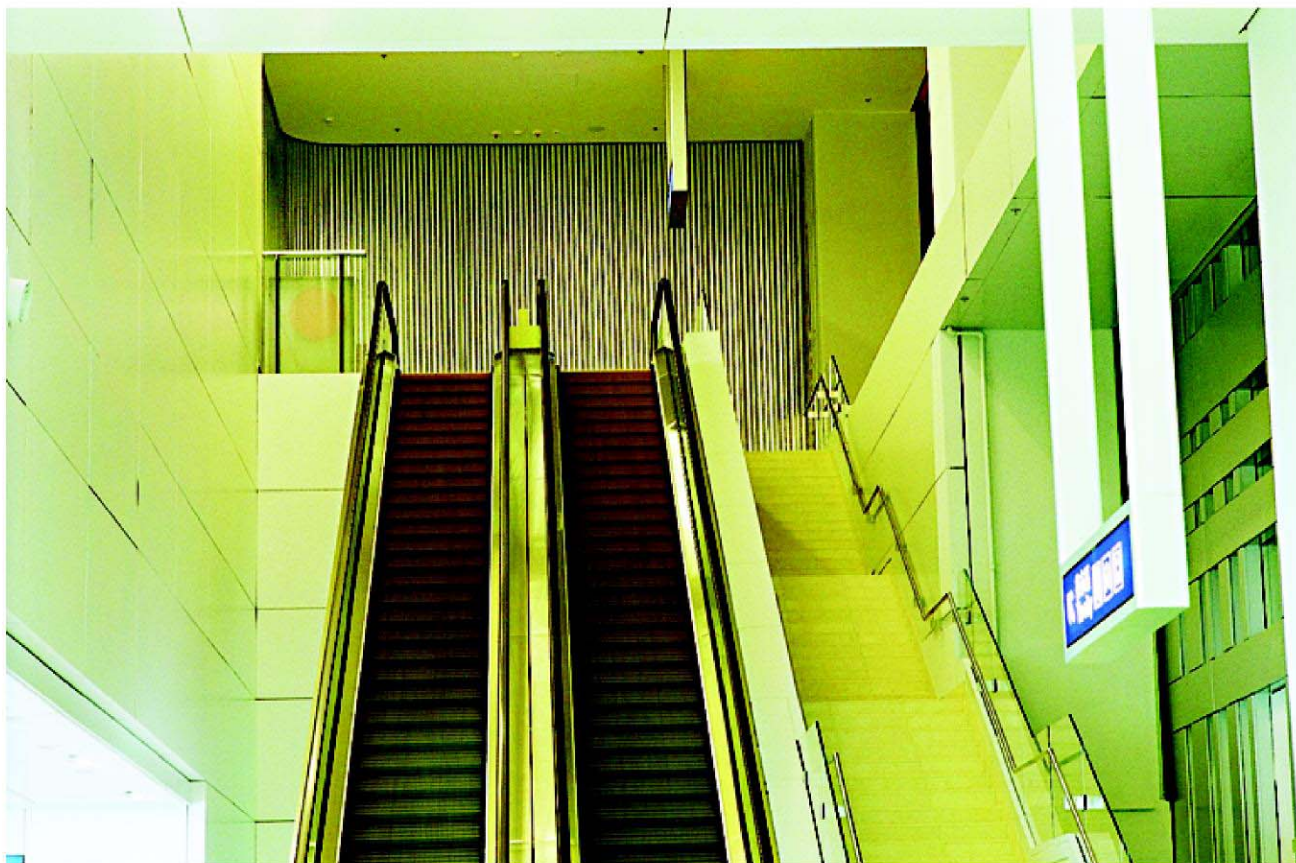

Fire rated laterally sliding shutter in Skyplaza, HK



Tested in accordance with BS 476:Part 22:Clause 8, 1987  
Best for limited headroom space and circular on plan

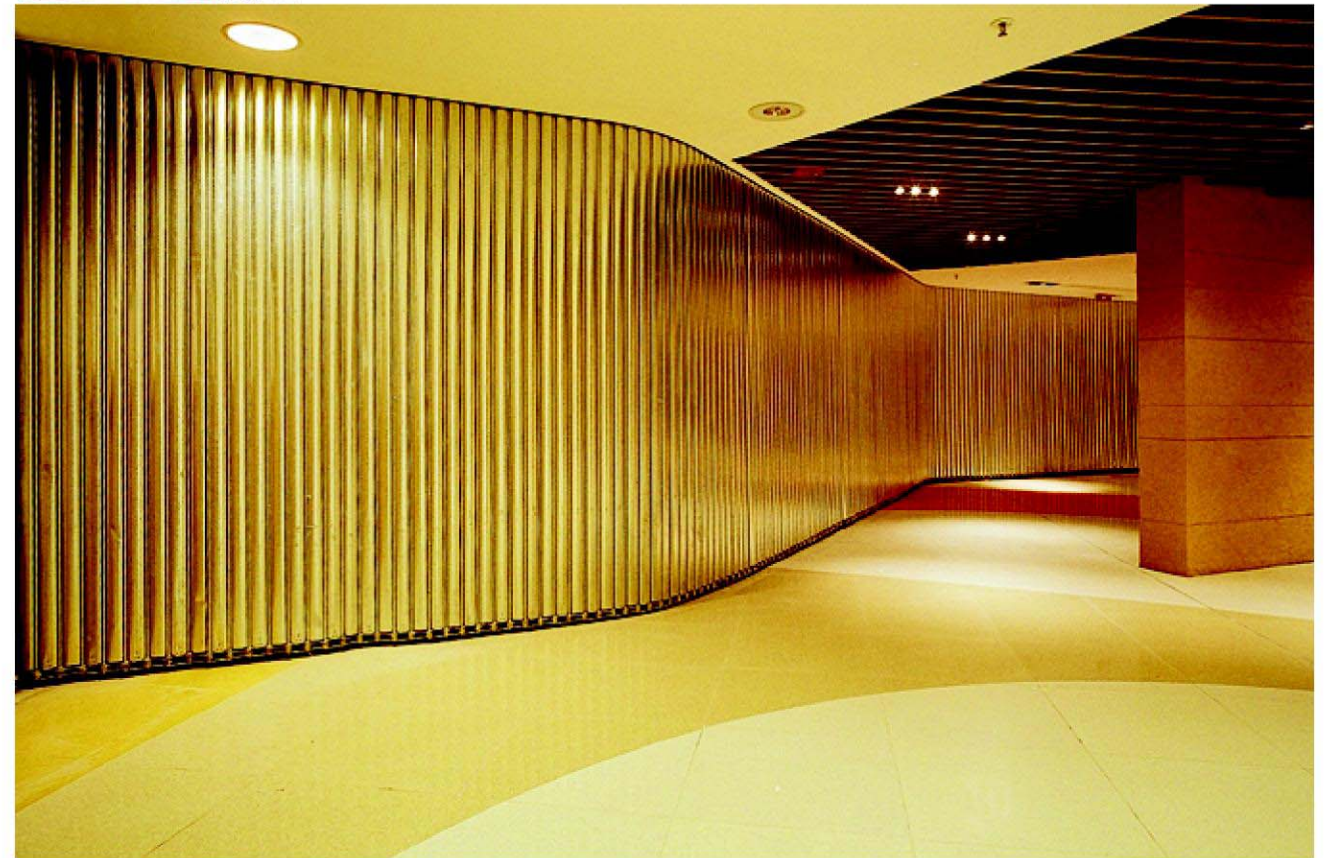

17500 (W) x 2400 (H) Fire Rated Laterally Sliding shutter in Kowloon Bay



15000mm (W) x 8000mm (H) Fire Rated Laterally Sliding shutter in Singapore Airport