


## CHUNG TAI FIRE RATED HORIZONTALLY SLIDING ROLLER SHUTTER

- Performance :** • With 2 & 4 hours fire rating
- Sizes :** • To suit opening up to 7000mm width x 40000mm length  
• Individual assessment for larger sizes is available.
- Materials :** • Stainless steel SUS 316 & SUS 304, hot dip galvanized mild steel or combination of GMS and stainless steel
- Side Channel:** • Fabricated steel channel screwed to wall, concealed to wall or fixed to a fire rated glazing panel.
- Operation :** • Electric motor driven.  
• Control systems ensure shutters close when fire signal is received.




The fire rated horizontally sliding shutter is for escalator fire protection.

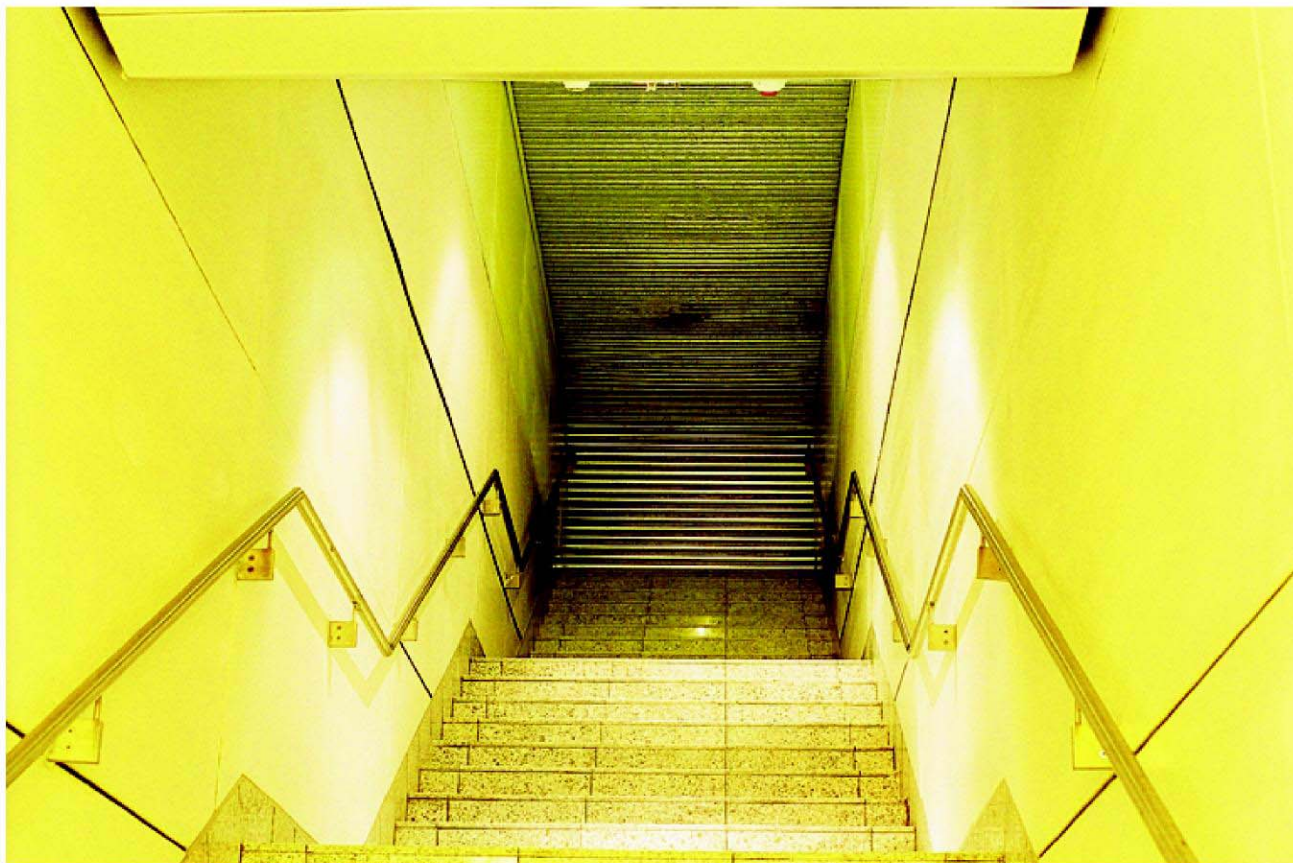


The fire rated horizontally sliding shutter for staircase fire protection



Tested in accordance with BS 476:Part 22:Clause 8, 1987  
For Staircase, Escalator & Skylight Fire Protection

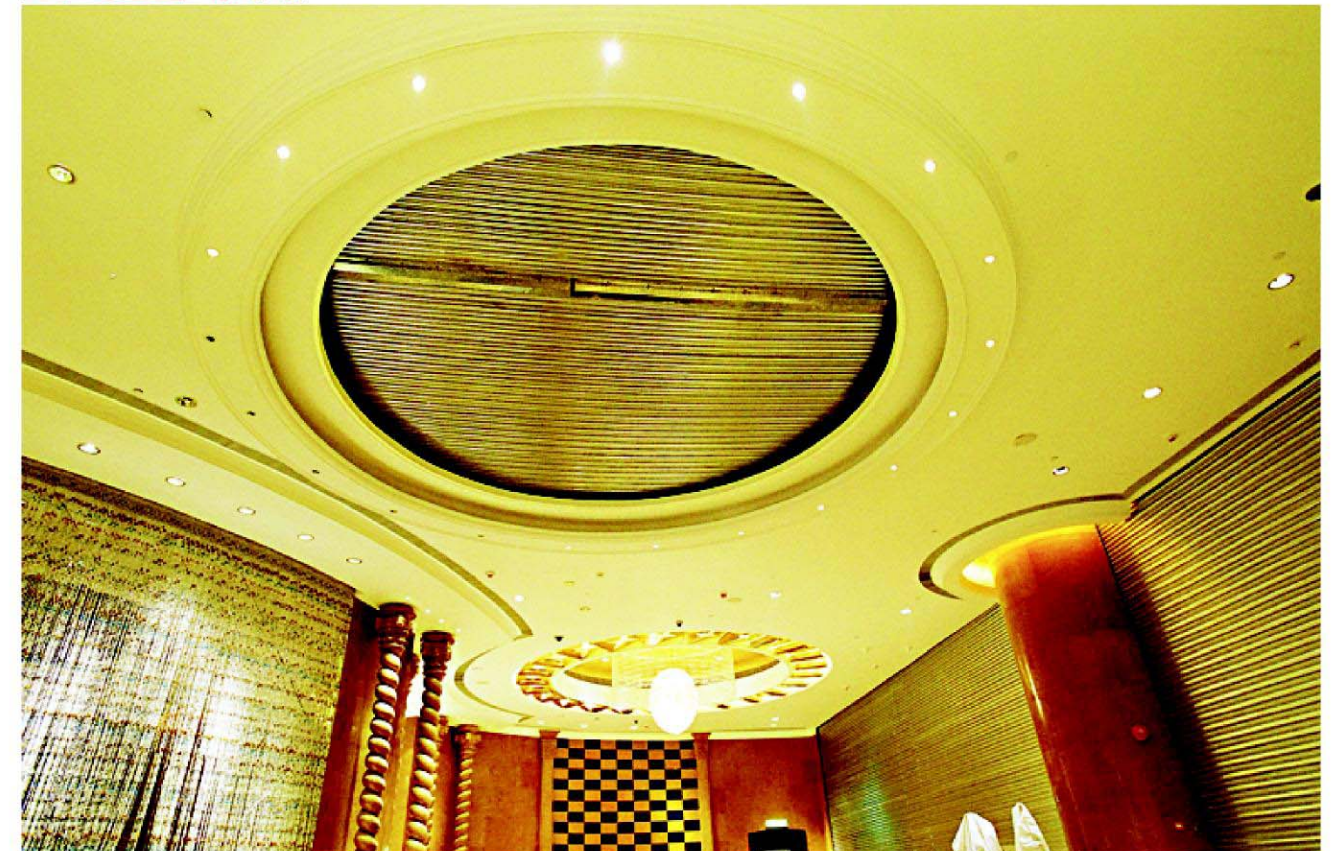

7000(W) x 12000(L) horizontally sliding fire rated roller shutter, Ponte 16, Macau

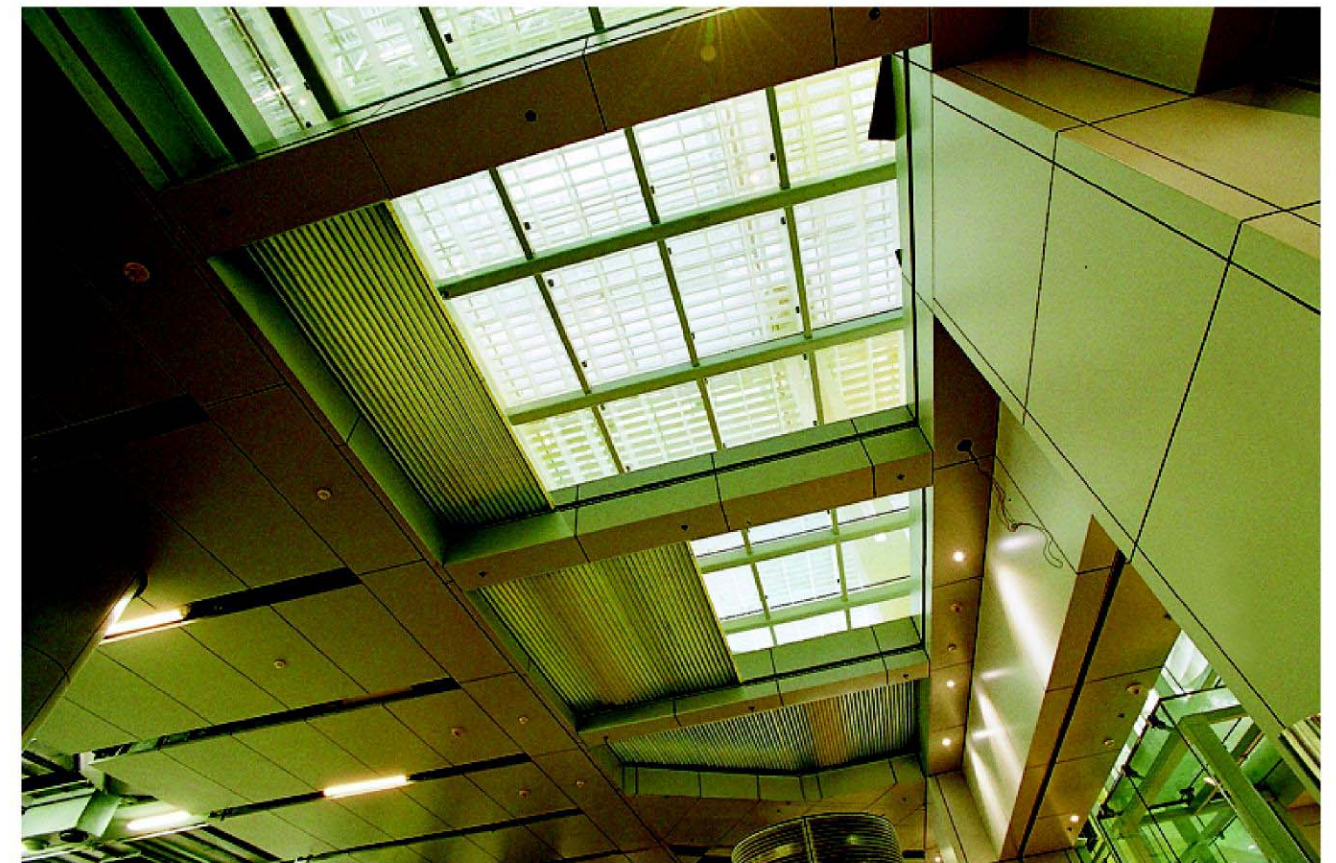

34 nos. fire rated horizontally sliding shutter for skylight fire protection, Skyplaza, HK