

CHUNG TAI FIRE RATED AIR LOUVER

Performance:

- 4 hours fire rating
- 42% air flow with louver located at 1000mm from F.F.L.
- 23% air flow with louver located at 2900mm from 1000mm

Material : • Made of Galvanized mild steel, Stainless steel SUS #316 or SUS #304

Sizes : • Maximum opening width at 900mm and 2700mm at three continuous louvers joint with two centre mullion

• Maximum height is 2900mm from the floor level


Application : • Attached on steel roller shutters

• Attached on steel doorsets as lower half, upper half or full louver

• Installed on concrete or masonry wall




Upper / Lower fire rated louver can be fixed on fire rated door, 4 hrs fire rating with 42% air flow rate.

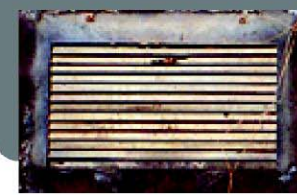

Tested in accordance with BS 476:Part 22:Clause 8, 1987

Installed on concrete or masonry wall

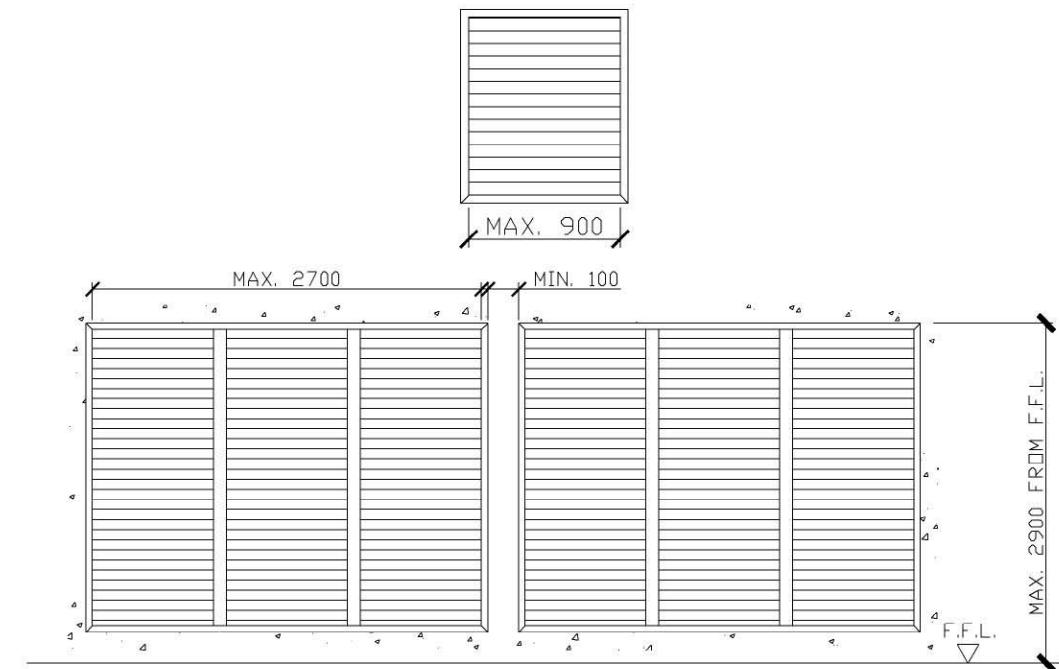

Fire rated shutter can be complied with fire rated air louver. CLP Substation