





- Performance** : • With 2 & 4 hours fire rating.
- Materials** : • Ceramic fibre shutter curtain with steel guide rail and bottom bar
- Size** : • To suit opening up to 20000mm width x 7000mm height
- Operation** : • Operated by self weight sliding down or electric motor driven control systems ensure shutters close when fire signal is received
- Specialty** : • comply with BS476:22:8, 1987;
- provide 4 hours fire rating;
  - fully fulfill fire rated shutters requirements of E&M and BD.
  - Best for limited headroom, only takes 200-250mm;
  - Best for uneven floor level;
  - Lightweight curtain to suit large spans shutters;
  - Built-in barrel type or exposed type motors are both applicable;
  - Power supply: 220V, 1 Phase or 380V, 3 Phase;
  - Secondary source of electricity supply is applicable, adjustment on the transformer is not needed;
  - With or without shutter hood.

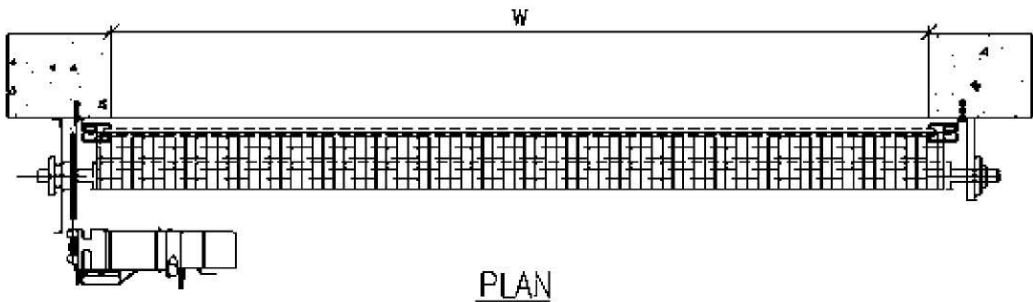

Tested in accordance with BS 476:Part 22:Clause 8, 1987

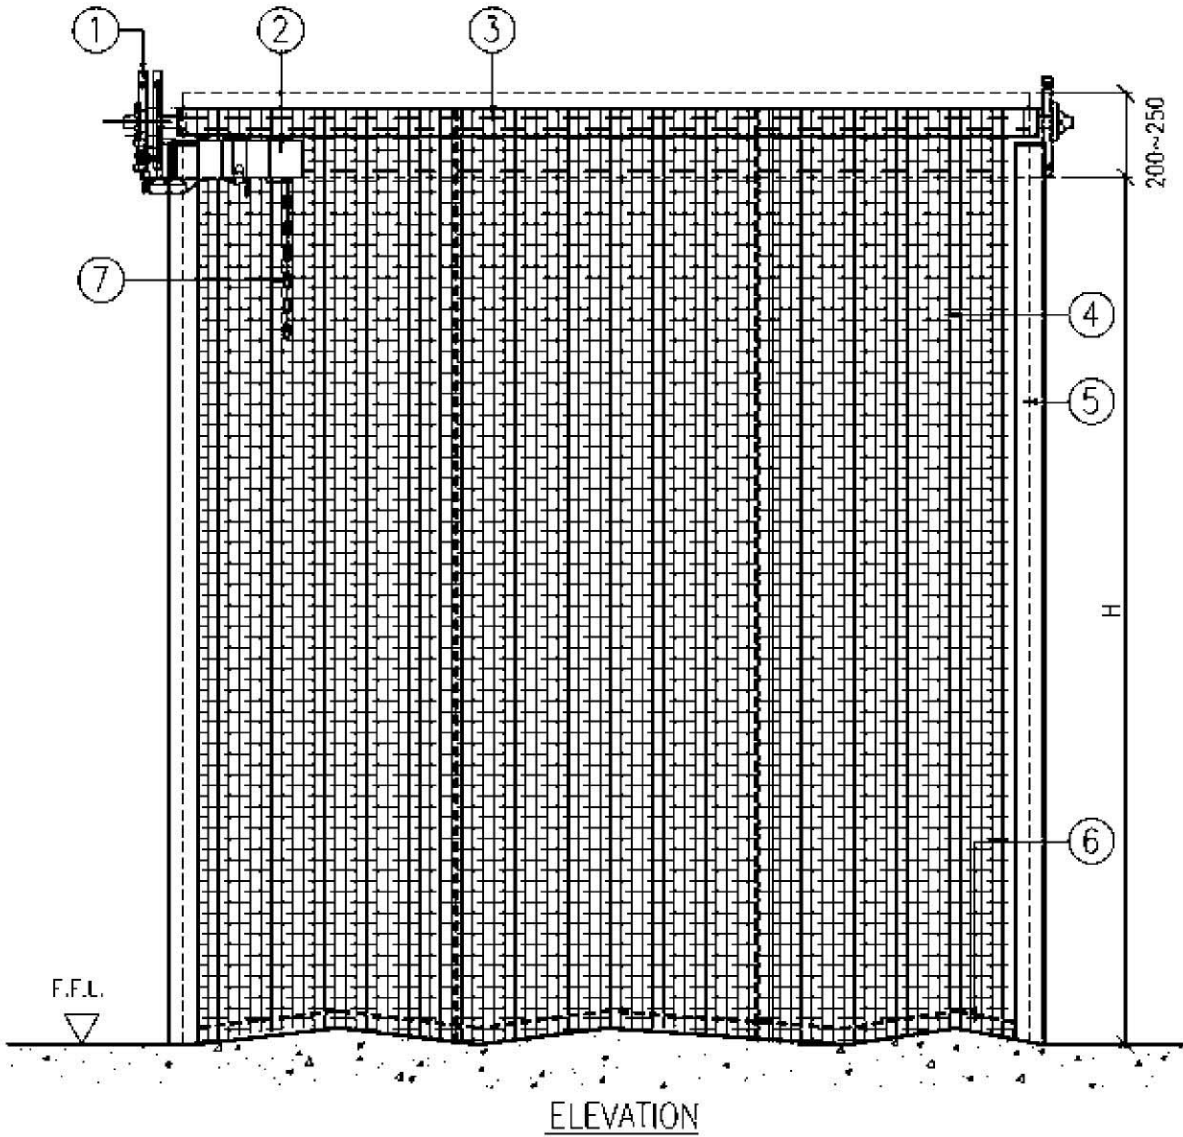

- |            |                                 |                |
|------------|---------------------------------|----------------|
| 1.ENDPLATE | 4.CERAMIC FIBRE SHUTTER CURTAIN | 6.BOTTOM PLATE |
| 2.MOTOR    |                                 |                |
| 3.BARREL   | 5.STEEL GUIDE RAIL              | 7.MANUAL CHAIN |