




Inkjet print advertisement can be added on our Shutter Curtain, hence making up a large outdoor advertisement board.




Galvanised mild steel shutter with slot hole slats located in Sheung Shui Station

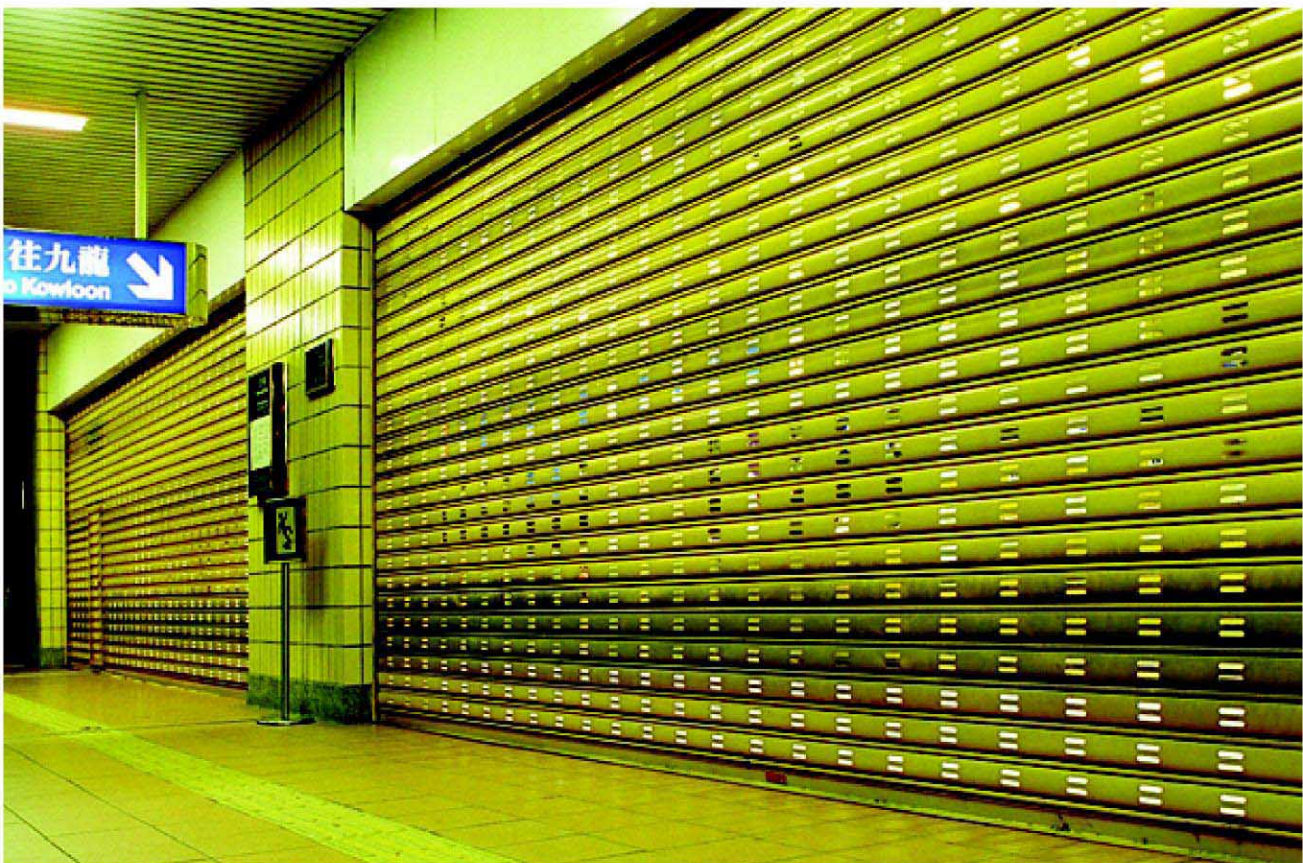

In term of green issue and reducing the electric fee, the hollow section insulated roller shutter is your choice.

- 100% recyclable
- Impact resistant
- High standard of durability
- Heat insulation, acoustic and typhoon resistance

Shutter Curtain : • Made of cold rolled hollow section steel slat
Model No. (Types of slat): • 75HS (SS) (GS) 75HSC (SS) (GS)

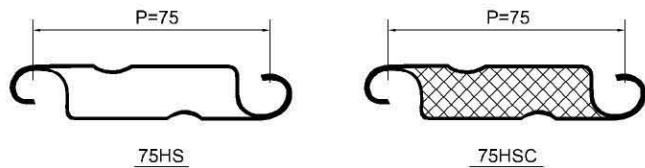

- Material** : • Stainless steel SUS 316 & SUS 304, hot dip galvanized mild steel
- Thickness of slat** : • Stainless steel SUS 316 & SUS 304 slat from 1.4 (0.7+0.7)mm to 2.4 (1.2+1.2)mm
• Hot dip galvanized mild steel slat from 1.4 (0.7+0.7)mm to 3.0 (1.5+1.5)mm
- Size** : • Width up to 15000mm and height up to 10000mm
- Operation** : • Manual operated (vertically sliding)
Electric operated (vertically sliding)
- Special feature** : • (75HSC) Ceramic wool can be added to slat cavity for heat and acoustic insulation
• Built with wicket door



With the optional typhoon posts, our roller shutters can cope under extreme conditions, perfect for users located outdoor location.